

PT56 POS

The thinnest bezel in the present time



Poindus



Hidden Cable Management



4.8mm Ultra-thin Bezel
Thinnest bezel in present time



Easy Service Cover
For RAM & SSD access



VESA Mount Capable#
75 x75 mm on wall/pole

Pole and bracket for VESA mount available to purchase separately

Distributed/Imported Exclusively by MachX Enterprise

MachX Enterprise

📍 67 Weaver Street Coopers Plains QLD 4108, Australia

☎ +61 7 3275 5855

✉ sales@machx.com.au

🌐 www.machx.com.au

MACHX

Integrated Printer

PT56 WP model is an All-In-One Point of Sale terminal with thermal printer housed within a sleek enclosure.

The printer, power supply and cables are all concealed inside the compact aluminium die-cast housing providing for a clutter-free counter space.



Peripheral Options



10.1" Second Display or 2-line VFD



RFID Reader



2D Scanner



3-track MSR

Extended I/O BOX




With the flexibility of converting to a Panel PC, the PT56 can be VESA mounted onto a pole and power via a Type C USB cable connected to the Extended I/O Box.

The Extended I/O Box can be mounted under the counter and the design provides for easy maintenance and quick swap for all peripherals connected to the box.

Specifications

VarIO I/O Box

Cash Drawer	1 x RJ11 (supports DC + 12V or 24V (default)), supports 2 cash drawers
LAN Port	1 x RJ45
USB Port	2 x USB 3.0, 4 x USB 2.0
Powered USB Port (Project Based)	2 x DC+12V powered USB, 1 x DC+24V powered USB
COM Port	4 x RS232 (jumper setting, support DC+0/5/12V, default setting is 0V)
Type-C	1 x Type-C

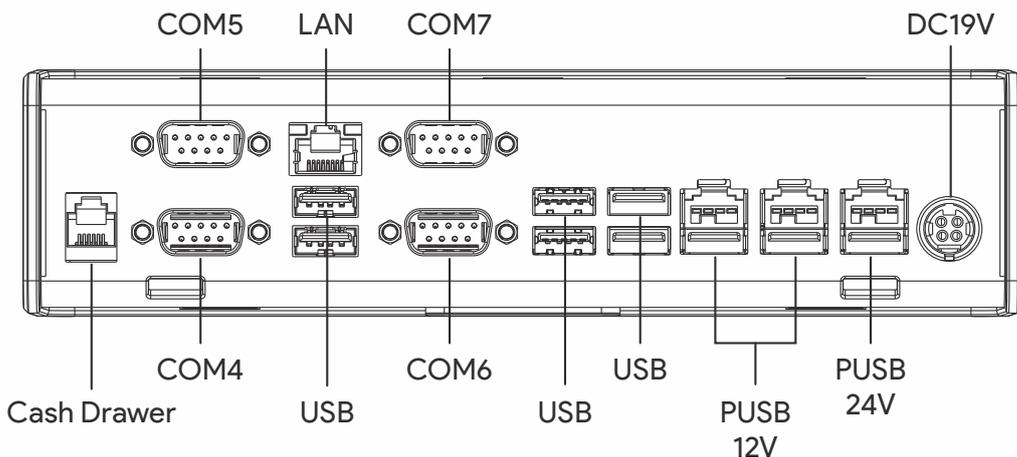



Specifications

	PT56 J6	PT56 i3
Processor	Intel Celeron Quad Core J6412 2.0 GHz (Turbo Boost up to 2.6 GHz)	Intel Dual Core i3-1215U 1.2 GHz (Turbo Boost up to 4.4 GHz)
System Memory	8 GB DDR4 SODIMM RAM (up to 16 GB)	8 GB DDR5 SODIMM RAM (up to 32 GB)
Storage	1 x M.2 SSD	1 x M.2 SSD

Display

	PT56 J6	PT56 i3
Size / Resolution	15.6" TFT LCD / 1920 x 1080 pixels	15.6" TFT LCD / 1920 x 1080 pixels
Brightness	350 cd/m ²	350 cd/m ²
Touch Screen Panel	Projected capacitive touch (true-flat)	Projected capacitive touch (true-flat)

I/O Interface

	PT56 J6	PT56 i3
USB Port	4 x USB 2.0, 3 x USB 3.1, 1 x Type-C (PD+DP)	4 x USB 2.0, 3 x USB 3.1, 1 x Type-C (PD+DP)
Serial Port	2 x RJ50	2 x RJ50
Audio Port	2 x 2 W speaker	2 x 2 W speaker
Network Port	1 x RJ45 Gigabit Ethernet	1 x RJ45 Gigabit Ethernet
Cash Drawer Port	1 x RJ12 (DC 12 V or 24 V by jumper setting, supports 2 cash drawers)	

Operating System

	PT56 J6	PT56 i3
Windows	10 IoT / 10 Pro / 11 IoT / 11 Pro	10 IoT / 10 Pro / 11 IoT / 11 Pro

Environment & Mechanical

Dimensions & Weight	No base: 360 (W) x 214 (H) x 40 (D) mm 3.6 kg With base: 360 (W) x 178 (H) x 261 (D) mm 5.2 kg WP base: 360 (W) x 340 (H) x 260 (D) mm 7.0 kg
Chassis Material	Heat-dissipating solid aluminium die-cast casing
VESA Pattern	75 x 75 mm
IP Rating	IP54 front panel
Temperature	Operating: 0°C to 40°C Storage: -20°C to 60°C
Humidity	Operating: 20%-80% Storage: 20%-80% (non-condensing)
Power Consumption	19 V / 3.42 A, external power adapter, 100-240 V, 50/60 Hz

Model Options

Integrated Card Reader	3-track MSR, RFID reader
Customer Display	10.1" (1280 x 800 pixels) TFT LCD display or 2-line VFD
Logo	Customisation of your own logo for orders over 50 units

All product specifications are subject to change without notice.

MachX Enterprise

67 Weaver Street Coopers Plains QLD 4108, Australia

+61 7 3275 5855

sales@machx.com.au

www.machx.com.au

